
1UP MULTI TOOL

Tools Required:

- Philips Screwdriver (x2)

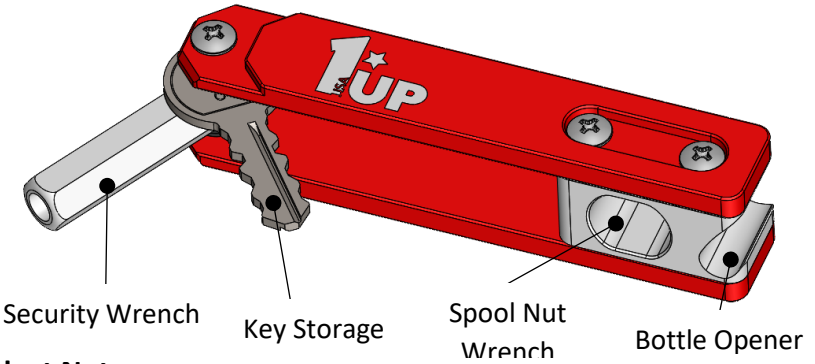

Product Notes:


- Key(s) **NOT** included (unless otherwise stated)
- It is **NOT** recommended to install both keys that came with your rack on the same tool. Two key capacity is intended for setups with multiple locks and unmatched keys.

Key Installation:

- Place the tool on a flat, hard surface with the three matching screw heads facing up (green circle).


Important: Keep the slotted fastener (yellow circle) facing down. This fastener acts as a post that holds the rotating components in place and prevents them from falling out during disassembly.

- Remove all three screws (the screw on the security wrench end may require a second Philips from the back side)
- Remove Red Side piece

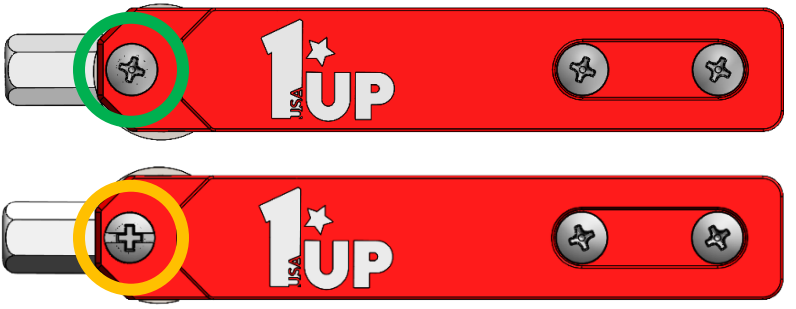


Key Installation Contd.

- Arrange key and spacers as shown below.
    - If including two keys, ensure there is one spacer between each component.

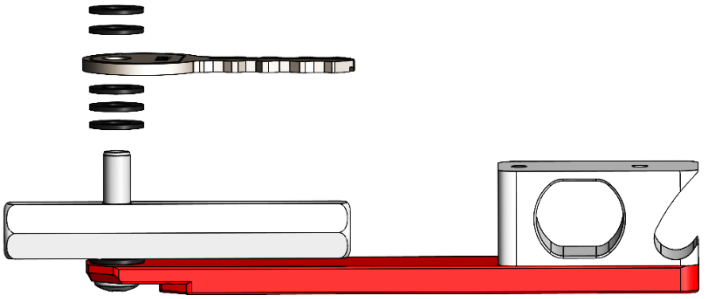



- Reinstall Red Side piece using three Philips screws, reversing the earlier process

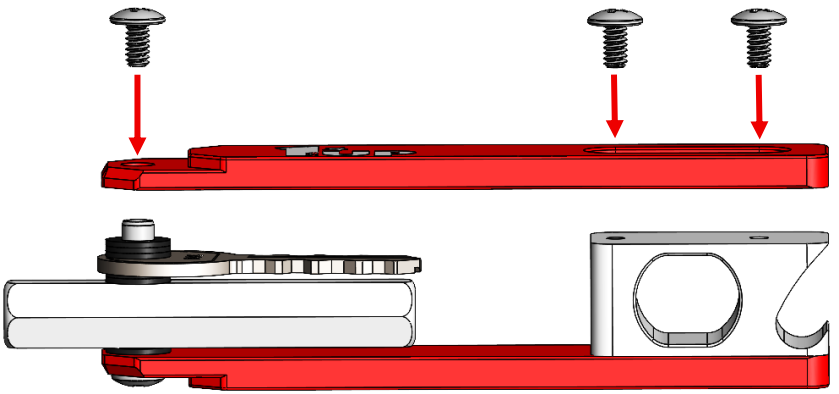

Additional Instructions:

- Check and tighten screws periodically
- Short Security Wrench end intended for tightening ramp to rack
- Spool Nut Wrench use illustrated below

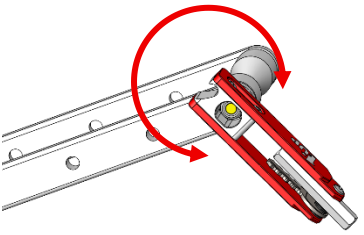

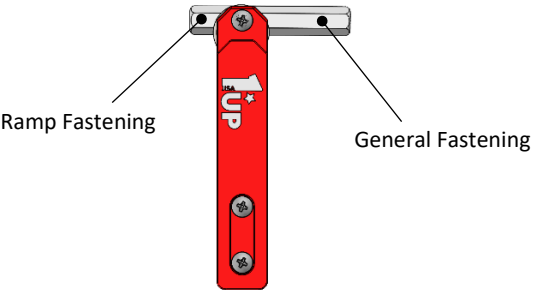

Questions or comments? Contact our support team via email at email@1up-usa.com